

INDUS 1

DATASHEET

FLOOR VERSION

INDUS 1 - 19" FLOOR CABINET INDOOR - IP55

PRODUCT DESCRIPTION

The series Indus 1 of barpa are designed for industrial purposes. With IP55 protection class against dust and water jets (EN60529). Solid front and rear door and already mounted.

FEATURES

Gasketed doors, with swing handle door lock with 2 point locking system
Door open until 140 degrees
Epoxy polyester type powder coating which is RAL 7035 Light Grey color
Welded Frame
Possible to install fans or ventilation of barpa

APPLICATIONS

Warehouses, factories, where they are harsh environments but with no direct rain or external usage.

SPECIFICATIONS

Standard	IEC 60529:1989+A1:1999+A2:2013; ANSI/EIA RS-310-E; IEC 60297-3; DIN41494 Part 1 and 7
Material	SPCC 19' rails: 2,0mm; Others: 1,2mm
Loading Capacity (kg)	1000
Color	Grey (RAL7035)
Earth connection	Yes
Index Protection	IP55
IK	10

RECOMMENDATIONS

Do not change the construction or design of the cabinet
Load the weight equally
Do not damage the cabinet mechanically
Do not install in outdoor
Do not install next to places with danger of explosion
Do not overload

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu

INDUS 1 - 19" FLOOR CABINET INDOOR - IP55



ROBUST CONSTRUCTION

barpa has a robust and welded construction. High quality processing and the newest technologies ensure a perfect look of the cabinet.



FLEXIBLE DOOR OPENING

The hinge system allows the door to open until 140°.



HANDLES

We manufacture the handles to be easy and safe to use, with 2 point locking system.



GASKETED DOOR

With gasketed door helps prevent dust and water jets getting inside.

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu

datasheet nº b139_4 | date: 10/25
approved by: Ana Barbosa

INDUS 1 - 19" FLOOR CABINET INDOOR - IP55




LOAD CAPACITY

1000kg load capacity, allow you to use the cabinet with no worries of weight.



PLINTH

With plinth with holes for passive ventilation and also holes for entrance of cables.

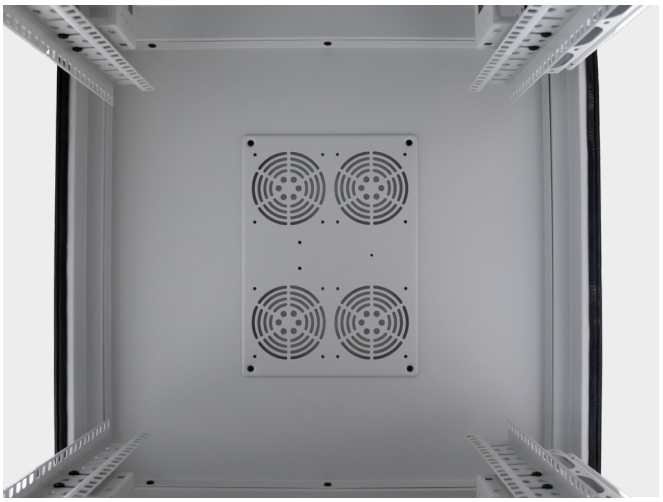

TOP VIEW

You have the possibility to install ventilation in the top of the cabinet.



BOTTOM VIEW

In the bottom you find holes to open for cables and also some holes with filter for the cold air.

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu

INDUS 1 - 19" FLOOR CABINET
INDOOR - IP55



WATER CONDENSATION

You find in the bottom of the cabinet holes to remove the water condensation.



EARTH GROUND

Cabinet ready for earth ground connection.



ADJUSTABLE VERTICAL RAILS

Vertical 19" rails can be adjusted freely in depth of the cabinet.





CABLE MANAGEMENT

The cable management bar is included for your cable organization.


This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu


TECHNICAL DRAWING (mm)

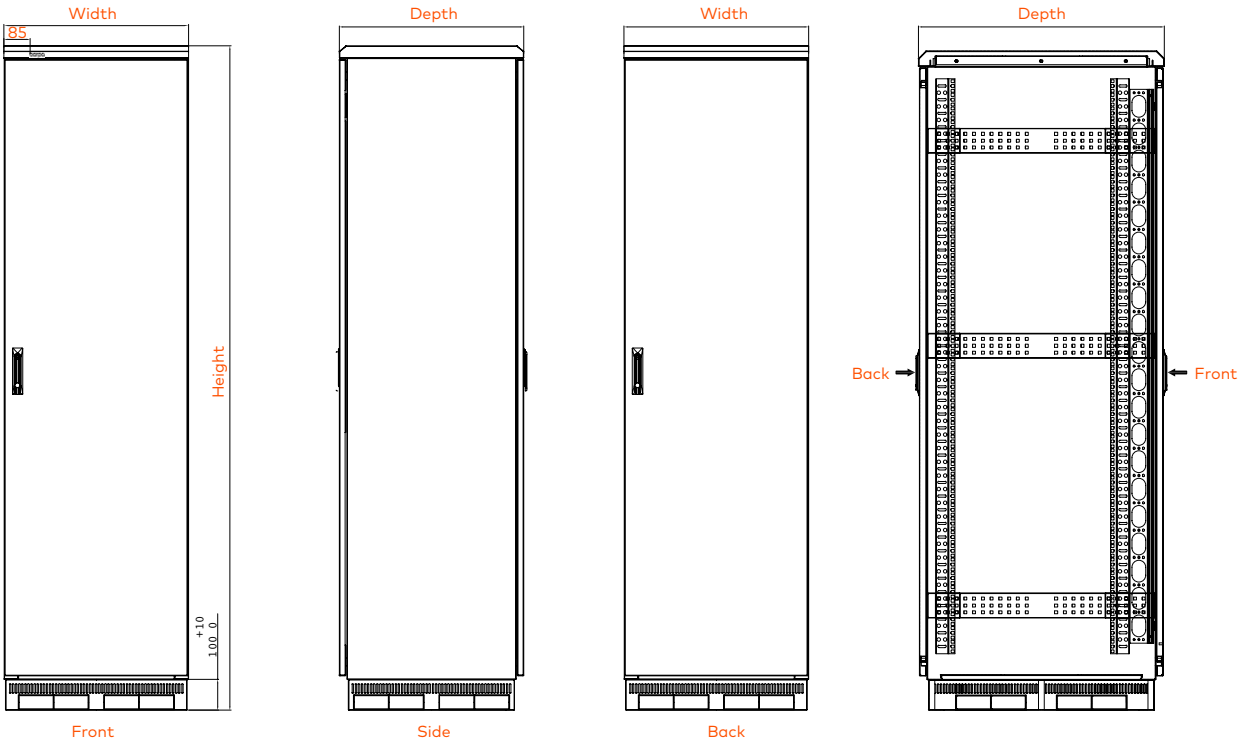



PASSIVE VENTILATION

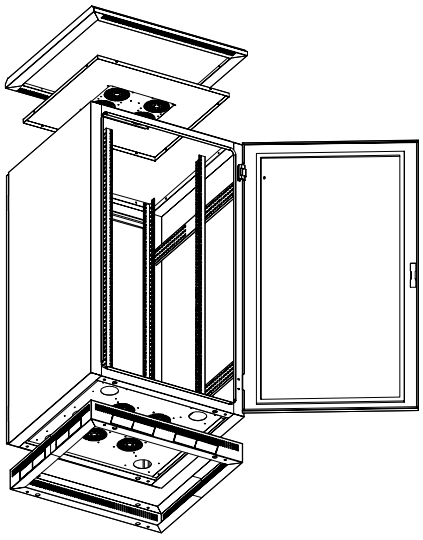

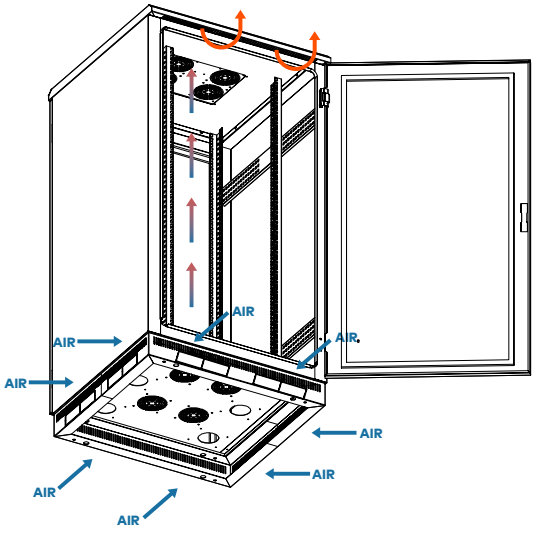

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu

PACKAGING

Totally mounted with included pallet



ORDER INFORMATION

Code	U	Width (mm)	Depth (mm)	Height Mounted (mm)	Weight (kg)	EAN
82343420808	42	800	800	2145	151	5608445032515

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.